LA INDUSTRIA DE LA CERRAJERÍA

Laua series bolt lock 1202

Descripción


Lock for double manoeuvre, encoded to combine with other safety locks. Bolt works in both positions, extended and retracted. Key is free when bolt is extended. When bolt is retracted, key is trapped and the mechanism is locked. When bolt is retracted the switch is activated. To start the sequence in standard manoeuvre, the key in the second lock has to be trapped.

MANOEUVRE		BOLT		CODE
	LENGHT	THROW	THREAD	
STANDARD	18	13	NO	UP1202I0F0
STANDARD	35	13	NO	UP1202I0F01

STANDARD MANOEUVRE

Fotos

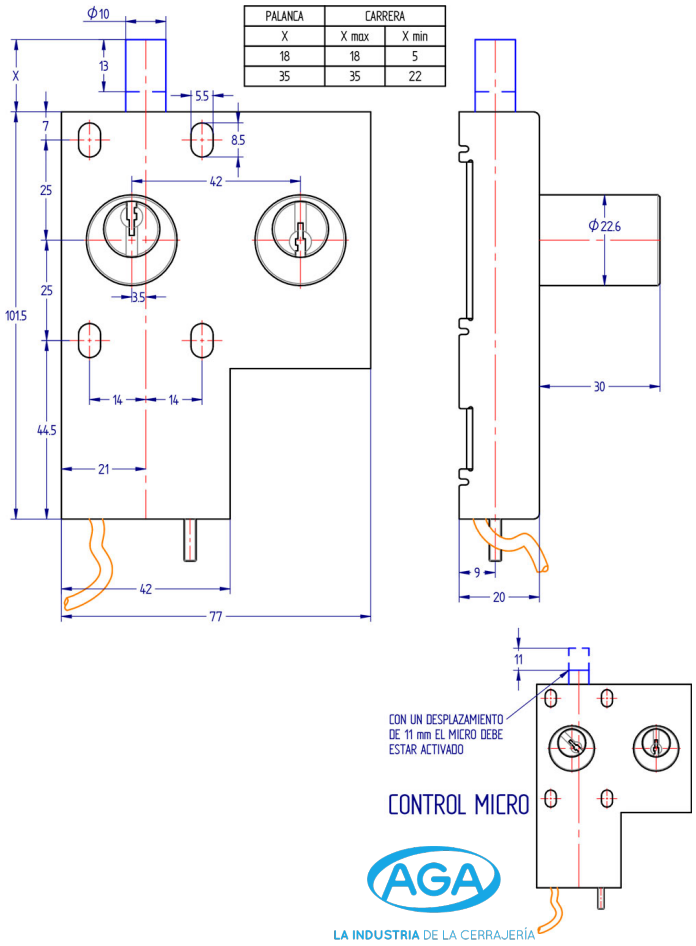


PALANCA
CARRERA
X
X max
X min
18
18
5
35
35
22
Φ10
13
X
5.5
8.5
7
25
25
101.5
42
3.5
14
14
44.5
21
42
77
Φ22.6
30
9
20
11
CON UN DESPLAZAMIENTO DE 11 mm EL MICRO DEBE ESTAR ACTIVADO
CONTROL MICRO
AGA
LA INDUSTRIA DE LA CERRAJERÍA