LA INDUSTRIA DE LA CERRAJERÍA

7501 Solenoid controled lock, Borobil Series


Descripción

Electro mechanical lock controled by a solenoid wich allow the standard manouvre (solenoid energised = key free). The state of the lock is controlled by a switch.

MANOUVRE	VOLTAGE	CODE
STANDARD	110 v.	UT7501I011
STANDARD	220 v.	UT7501I021

Fotos

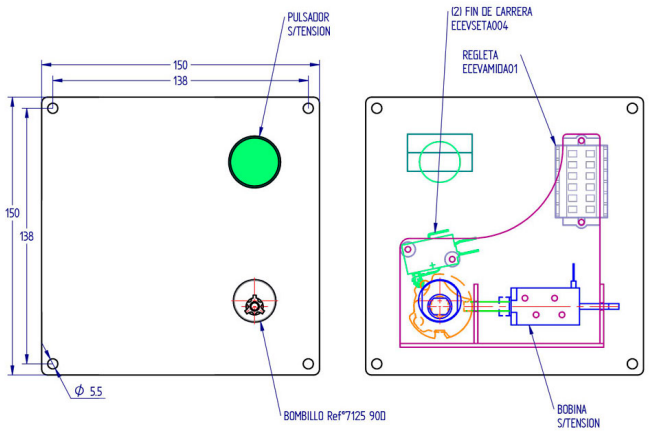


PULSADOR
S/TENSION
150
138
150
138
ϕ 55
BOMBILLO Ref°7125 90D
(2) FIN DE CARRERA
ECEVSETA004
REGLETA
ECEVAMIDA01
BOBINA
S/TENSION